

HTC - the Innovators, not the imitators!

HTC T-Rex® New T-Rex® Super series



The next generation of T-Rex® tools are here. The new design and latest diamond technology provides unique advantages for the flooring contractor.

The new tooling series is a further development of HTC's previous T-Rex® tools. The developments give the tools their extreme properties, like an exceptional cutting ability, which is useful when removing thick floor coatings. An increased efficiency and life, which in turn provides an improved tool economy during floor preparation, are the main advantages with the new T-Rex® Super.

- Extended life leads to an improved tool economy
- Exceptional removal capacity
- Available with or without a protect segment, and A and B version



What is a "protect segment"?
What does "A and B version" refer to?

A protect segment is an extra diamond segment that improves the grinding performance and optimizes the pressure on the other diamond segments. A and B versions are necessary when using T-Rex® tools on HTC's planetary machines with counter-rotating grinding discs (HDX models).



Runner guard



A and B versions are necessary for HDX models.

T-Rex[®] Super Guide

HTC T-Rex[®] Super - When maximum efficiency is desired.



Name	Art.no	Description
EZ T-Rex Super A	212454	Suitable for removing all types of coatings and coarse grinding. The tools have an exceptionally high removal rate, resulting in maximum efficiency.



EZ T-Rex Super A Protect segment	212455	Suitable for removing all types of coatings and coarse grinding. The tools have an exceptionally high removal rate, resulting in maximum efficiency.
---	--------	--



EZ T-Rex Super B	212456	Suitable for removing all types of coatings and coarse grinding. The tools have an exceptionally high removal rate, resulting in maximum efficiency.
-------------------------	--------	--



EZ T-Rex Super B Protect segment	212457	Suitable for removing all types of coatings and coarse grinding. The tools have an exceptionally high removal rate, resulting in maximum efficiency.
---	--------	--


Recommended T-Rex tools for removal of different floor coatings

	Thin coatings, 0-2 mm	Coatings, 2-4 mm	Thick coatings, 4 -> mm
T-Rex	X		
T-Rex DOME	X	X	
T-Rex SUPER	X	X	X



Ultra-fast change of diamond tools!

Fit the wing of the tool into the slot on the holder. There is only one position where it will fit. Gently tap the tool firmly into place with a rubber hammer. You are now ready to start!

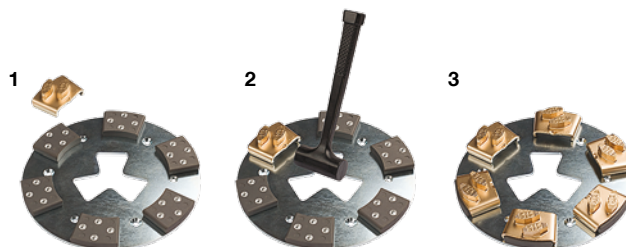

HTC Sweden AB

Postal address: Box 69, 614 22 Söderköping, Sweden
 Visitors/delivery address: Klevvägen 7
 614 92 Söderköping, Sweden
 Phone: +46 (0)121-294 00. Fax: +46 (0)121-152 12
 E-mail: info@htc-sweden.com

